

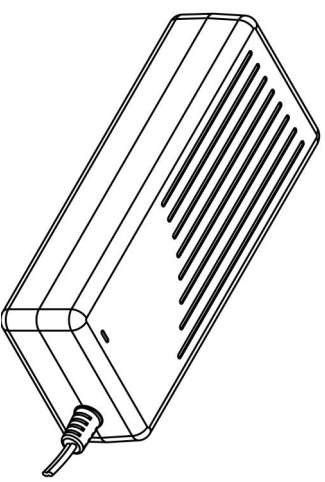
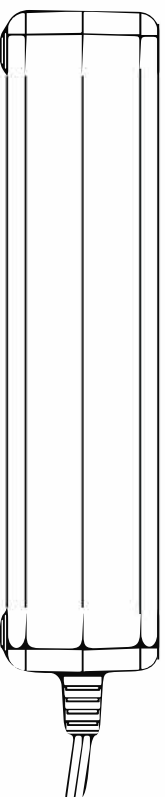
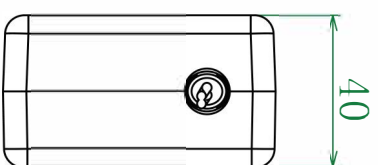


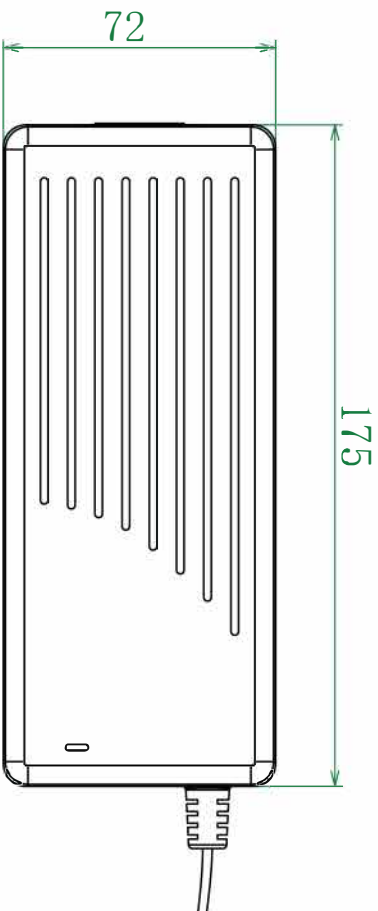

A100-36 (41.4V 1.8A) Pb-Acid Battery Charger		
Item	Specification	Remark
<b>1.Input</b>		
Rating input voltage	100~240Vac 50/60Hz	
Input voltage range	90~264Vac	
Rating input current	1.5Arms	Input:100V Output:Full load
Max input power	100W	Input:100V Output:Full load
<b>2.Output</b>		
No load output voltage	DC41.4V	
Output voltage range	DC30.0~44.1V	
Suit with battery type	36V Pb-Acid battery	
Charging current	1.8A $\pm$ 10%	
Charging voltage	DC44.1V $\pm$ 0.9V	
Floating charge voltage	DC41.4V $\pm$ 0.6V	
Charge-end current	$\leq$ 0.3A $\pm$ 0.1A	
Timer	10H	
Max output power	79.38W	
Ripple voltage	$\leq$ 414mV	Full load
Charging LED	Red:Charging	
	Green:Full charge or idle	
Shorted	Yes	
Reversed	Yes	
Efficiency	$\geq$ 87%	Full load @220V
<b>3.Environment</b>		
Operate temperature	-10 ~ +40 $^{\circ}$ C	
Operate humidity	< +90%	Relative humidity
Storage temperature	-40 ~ +70 $^{\circ}$ C	
Storage humidity	0 ~ +95%	Relative humidity
Cooling	Natural	
Vibration resistance	5MM/50HZ/600S	Non-operating condition
Impact resistance	1 meter drop test 3 times	Non-operating condition
<b>4.Mechanical</b>		
Weight	400g	
Size	175X72X40MM	Casing only
Connector	Refer to order	
<b>5.Safety</b>		
Max. temperature rise	< 40 $^{\circ}$ C on casing	
Safety approval	CE/cTUVus/CCC/PSE	
MTBF	30000H	
ESD	8.0KV	
Hi-Pot Insulation	i/p to o/p: 3000V (1 min)	

CUSTOMER REV	REV	ZONE	DESCRIPTION	CHA BY/DATE	APP BY/DATE

TOLERANCE FOR METAL	
DIVISION DIMENSION	TOLERANCE
-10	±0.08
10-30	±0.11
30-50	±0.13
50-80	±0.15
80-120	±0.18
120-180	±0.20
180-250	±0.25
250-400	±0.30



SHENZHEN GREEN DIGITAL POWER TECH CO., LTD

TITLE: \_\_\_\_\_ MATL: \_\_\_\_\_

MODEL: 100W-XXXXXX WEIGHT: \_\_\_\_\_

DES BY: \_\_\_\_\_ CAD FILE: \_\_\_\_\_ TEXTURE NO: \_\_\_\_\_

CHECK BY: \_\_\_\_\_ COLOR: \_\_\_\_\_ Paper Size: A4 SCALE: Fit

APP BY: \_\_\_\_\_ FINISH/TREATMENT: \_\_\_\_\_ DATE: \_\_\_\_\_

PART NO.:	CUSTOMER P/N